


# SELECTION CHART

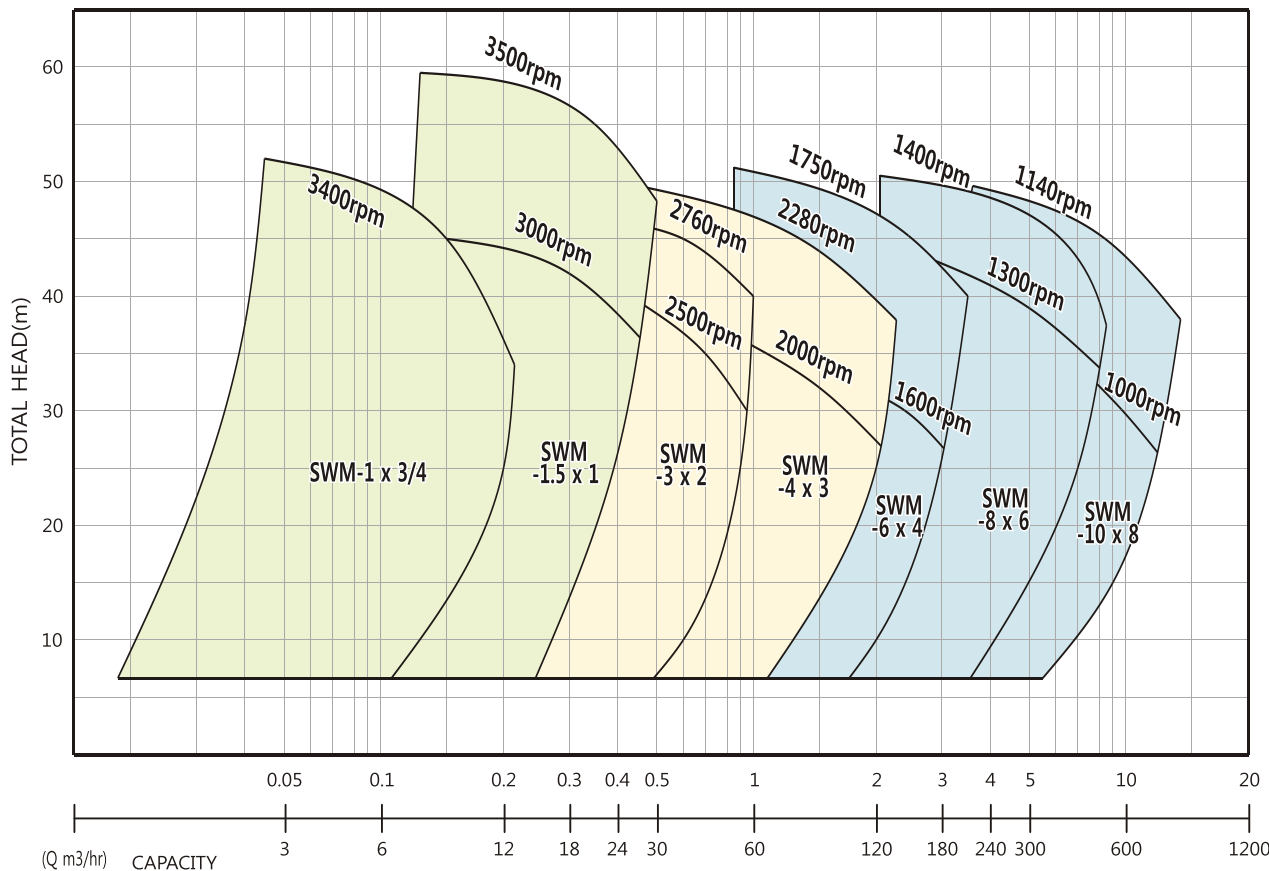

MODEL	BORE(mm) SUC x DIS	Specification		Revolution of Min(RPM)		Maximum axial power transmission (kw)	Vertical motor limitation (kw)	BEARING
		Flow rate(M/MIN)	Total head(M)	Rubber Type	Volute Type			
SWM-1 X 3/4	25 X 20	0.02-0.22	6-50	3400	3400	3.7	2.2	30305
SWM-3 X 2	80 X 50	0.15-1.0	6-45	2600	2760	11	11	30308
SWM-4 X 3	100 X 80	0.5-2.2	6-48	2000	2280	22	15	30310
SWM-6 X 4	150 X 100	0.85-3.5	6-50	1600	1750	45	30	30311
SWM-8 X 6	200 X 150	2.2-8.5	6-50	1300	1400	90	45	30314
SWM-10 X 8	250 X 200	3.8-14.0	6-48	1000	1140	132	45	32316